



**O'LEARY
PAINT**

INTERIOR

DURACAT
PRE-CATALYZED ACRYLIC EPOXY



GREAT PAINT GREAT PEOPLE

olearypaint.com

DURACAT

DURACAT is an innovative waterborne single-component epoxy featuring the performance of a two-component epoxy and the convenience of an acrylic. With no sweat-in time, this ready-to-use epoxy finish requires no catalyzing and has an infinite pot life for simplified application and improved cost-saving with reduced material waste. The low-odor epoxy finish is durable enough to withstand repeated washing with most typical cleaning solutions, and protects from the rigors of heavy wear such as marring, staining, moisture, and discoloration.

DURACAT is a professional coating formulated for maximum protection and convenient maintenance. The highly durable finish provides protection for vertical surfaces requiring maximum protection including hallways and corridors, bathrooms, dormitories, healthcare facilities, and schools.

FEATURES

- Cost-Saving Finish
- Convenient Maintenance
- Improved Service Life
- Low-Odor, Low-VOC
- No Mixing/Catalyzing
- Easy Recoat

BENEFITS

Easy Application


Pre-catalyzed finish requires no intermixing, measuring, or sweat-in time for fast and consistent maintenance. DURACAT can be recoated without sanding or specialized bonding primers allowing for infinite recoats.

Minimal Disruption

Our environmentally responsible waterborne technology has no ammonia off-gas, making it great for use in commercial spaces causing little disruption and fast return to service.

Extreme Durability

Tough enough for the most demanding of commercial and industrial environments. Chemical and abrasion resistance provides unmatched durability and washability.

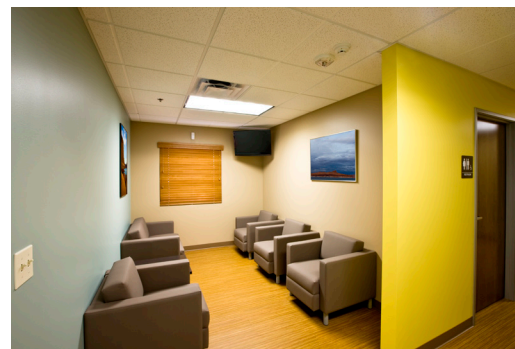

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 30 minutes* Recoat: 4 hours*

*Cooler temperatures and higher relative humidity will extend dry times

Application Temperature:

Apply Down to 50° F. Ask for details.

Recommended Spreading Rate:

350 sq. ft./ Gal to achieve
3.0-4.0 mils WFT; 1-1.5 mils DFT

Solids Content:

Volume: 40% ± 2

BASES: EGGSHELL - 3541 SERIES • SEMI-GLOSS - 3543 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: Minimum .70 GPM, 2500 PSI, .017-.019" tip.

HVLP: Twin-stage turbine, 5-8 PSI, .051 to .070 projector set

Roller: Short nap enamel cover

Brush: 100% Nylon or Synthetic Blend

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

< 100 g/L 0.83 lbs./Gal

PRIMER RECOMMENDATIONS

Drywall: High Hiding Drywall Primer/Sealer, 1200.

Plaster/Masonry: Concrete Sealer, 5090.

Wood: Wall and Trim Primer, 1330.

Galvanized Surfaces: Sungard Bonding Primer, 2090.

Steel Surfaces: Nexbond, IS113.

Block: Latex Block Filler, 529-11.

Repaint: Self-priming with appropriate surface prep.