



O'LEARY
PAINT

PREMIUM
**INTERIOR
EXTERIOR**

GRIPCRETE
MASONRY SURFACER



GREAT PAINT GREAT PEOPLE

MASONRY SURFACER

GRIPCRETE MASONRY SURFACER is a 100% acrylic surfacer designed to smooth and prepare masonry surfaces while protecting from alkali and efflorescence. This high-building surfacer/filler provides a smooth, uniform film, free of pin-holes for improved performance. GRIPCRETE MASONRY SURFACER's heavy duty formulation can be finished with a variety of coatings while tolerating the high pH levels of new interior and exterior masonry surfaces.

GRIPCRETE MASONRY SURFACER is designed for maximum film-build helping to smooth and seal highly porous block, brick, and other cementitious surfaces. The strong, uniform film provides early alkali resistance, protecting subsequent architectural and high-performance coatings. Formulated for professional application, it can be used on interior and exterior porous masonry surfaces that require lasting alkali and efflorescence protection.

FEATURES

- High Performance Block Surfacer
- Superior Filling Qualities
- Reduced Finishing Timelines
- Extended Coating Lifecycle

BENEFITS

Reduced Finishing Timelines

Formulated to tolerate high-pH (7-13) surfaces cutting the time needed for mortar, masonry, and cementitious surfaces to neutralize.

Outstanding Sealing Properties


High volume solids provides exceptional sealing and filling of voids in porous masonry surfaces preparing for a variety of architectural and industrial coatings.

Extended Coating Lifecycle

Alkali and efflorescence blocking technology protects subsequent finish coats from premature deterioration and unsightly mineral deposits.



BRUSH, ROLL, OR SPRAY APPLICATION

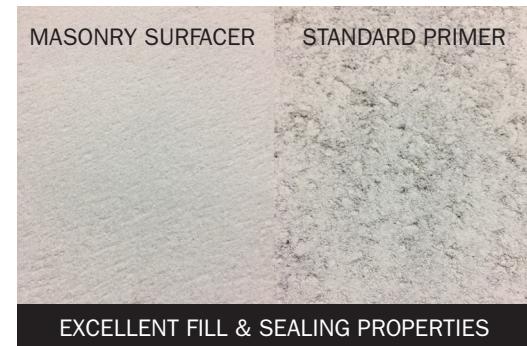

EXCELLENT FILL & SEALING PROPERTIES



PREVENT EFFLORESCENCE-INDUCED FAILURE

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 1 Hour

Recoat: Overnight

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

80-100 sq. ft./Gal to achieve 15-20 mils WFT; 7.7-10 mils DFT

Solids Content:

Volume: 71% ± 2 Weight: 51% ± 2

BASES: WHITE - 946-11 SERIES

EQUIPMENT RECOMMENDATIONS

Roller: 3/4" to 1 1/4" nap synthetic or lambswool cover

Brush: 100% nylon or synthetic blend

Airless: Minimum 1 GPM airless with 3/8" hose and .021" tip, 2500 PSI

HPV: Not recommended

SAFETY AND COMPLIANCE

VOC Content:

< 50 g/L < 0.42 lbs./Gal

FINISHING RECOMMENDATIONS

High-Performance: Compatable with all O'Leary manufactured products and many high-performance coatings.

Premium Finishes: Compatable with all O'Leary manufactured products and other architectural coatings.

Professional Finishes: Compatable with all O'Leary manufactured products and other architectural coatings.