



**INTERIOR
EXTERIOR**

STAIN SHIELD
ACRYLIC TANNIN & STAIN BLOCKING PRIMER



GREAT PAINT GREAT PEOPLE

STAIN SHIELD PRIMER

STICK N SEAL STAIN SHIELD PRIMER is a premium acrylic multi-purpose bonding primer. This problem-solving primer creates tenacious adhesion helping improve the performance of all topcoats. The versatility of this primer's proprietary formula also makes it a great option for troublesome stain-blocking situations including light water stains, lipstick, smoke, ink, crayon and more. Low-odor, waterborne nature make this the ideal primer for both interior and exterior projects requiring unparalleled adhesion.

STICK N SEAL STAIN SHIELD PRIMER is designed to provide exceptional adhesion when you need it most. The rugged, high-stick film can be used on a variety of drywall, wood, masonry, galvanized metal, aluminum and previously painted metal surfaces. This waterborne acrylic with flash-rust resistance make this an excellent primer for ferrous and galvanized metals.

FEATURES

- Exceptional Adhesion
- Low-Temperature Application
- Low-Odor Waterborne Acrylic
- Stain-Blocking Primer
- Interior/Exterior Rated

BENEFITS

Tenacious Adhesion

Improve the longevity and performance of paint systems on a wide range of hard-to-stick surfaces.

Versatile Primer/Sealer


Cut back on car stock with a single product that checks boxes for stain-blocking and adhesion.

Rugged Formulating


Low-odor waterborne formulation can be applied on a variety of interior and exterior surfaces in varying temperatures down to 35° F.



EXCELLENT TANNIN BLOCKING ON CEDAR

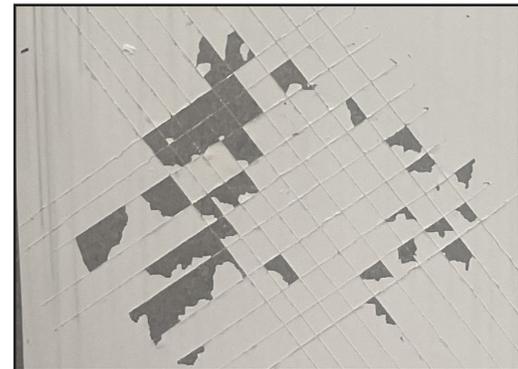

LIMITED ADHESION - CONVENTIONAL PRIMERS

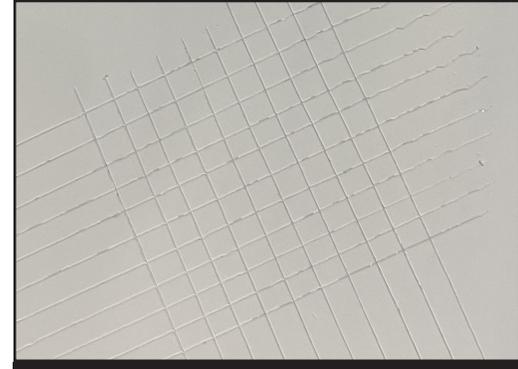

EXCELLENT ADHESION - BONDING PRIMER

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To touch: 1 hour*

Recoat: 4 hours*

* Cooler temperatures, higher relative humidity, and increased wet film thickness will extend dry times.

Recommended Spreading Rate:

350 - 450 sq. ft. / Gal to achieve 3.5-4.5 mils WFT; 1.5-1.7 mils DFT

Solids Content:

Volume: 38% ± 2 Weight: 54% ± 2

BASES: WHITE - 2090 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: Minimum .70 GPM, 2500 PSI, .017-.019" tip.

HVLP: Twin-stage turbine, 5-8 PSI, .051 to .070 projector set

Roller: Short nap woven cover

Brush: 100% Nylon or Synthetic Blend

SAFETY AND COMPLIANCE

VOC Content:

< 100 g/L 0.84 lbs./Gal

FINISHING RECOMMENDATIONS

Interior

Can be finished with any O'Leary interior latex or acrylic finishes.

Exterior

Can be finished with any O'Leary exterior paint finishes.

Compatibility

BONDING PRIMER can be top-coated with a wide range of interior and exterior latex and acrylic coatings. Perform a small test area to confirm compatibility prior starting any painting project.