



**O'LEARY
PAINT**

EXTERIOR



SUNGARD
EXTERIOR 100% ACRYLIC



GREAT PAINT GREAT PEOPLE

SUNGARD

For decades, Michigan has known and trusted SUNGARD to protect the exteriors of homes and businesses. Combining our classic 100% acrylic formula and thixotropic technology, the outstanding brushability and film build of SUNGARD has been the favorite of painters for decades.

This product is best used on most exterior surfaces including aluminum, vinyl, and wood siding, clapboard, shakes, shingles, plywood, masonry and primed metal down. SUNGARD is designed for the exterior of your home, office, and commercial new construction or repainting projects.

FEATURES

- Thixotropic Technology
- Cold Temperature Application
- High-Hiding
- Resistant to Dirt Pick-Up

BENEFITS

Thixotropic Technology


Thixotropic technology provides paint with a thick, hearty feel yet still glides off the brush. The “drip-less” advantage helps to cut back on drips and runs in your finish.

Outstanding Hide and Durability

The 100% acrylic formula provides outstanding hide and durability for years to come.

Cold Temperature Application

Formulated in Michigan for Michigan. Cooler temperatures will not slow you down with low-temperature application down to application down to 35 degrees.

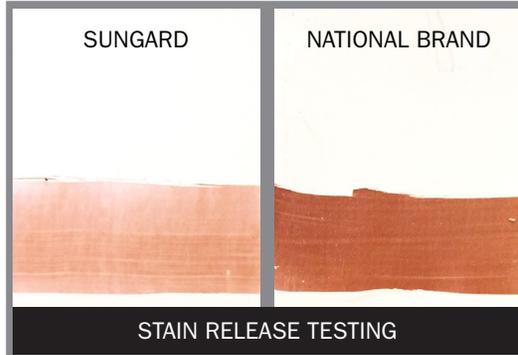

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:
To Touch: 1 Hour* Recoat: 4 Hours*
*Cooler temperatures and higher relative humidity will extend dry times
Application Temperature:
Apply Down to 35° F. Ask for details.
Recommended Spreading Rate:
Apply at 400 sq.ft./Gal to achieve 4.0 mils WFT; 1.4 DFT
Solids Content:
Volume: 36% ± 2 Weight: 48% ± 2

BASES: FLAT - 5550 SERIES · LO-LUSTER - 5551 SERIES · SATIN - 5552 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: Minimum .70 GPM, 2500 PSI, .017-.020” Tip
HVLP: Not Recommended
Roller: ½” - 1” nap synthetic cover
Brush: 100% Nylon or Synthetic Blend

SAFETY AND COMPLIANCE

VOC Content:
< 100 g/L 0.84 lbs./Gal

PRIMING RECOMMENDATIONS

Aluminum Siding: Self Priming.
Galvanized Metal: ProPrime Bonding Primer, #2090.
Steel: Nexbond Universal Primer, IS1113.
CMU, Concrete Block and Split Face: 529-11 Block Filler.
Masonry/Stucco: #50 Block-It Acrylic Primer Sealer.
Wood Surfaces: Tannin-blocking primer for Cedar and Redwood. All other species #4790 Acrylic Wood Primer.